

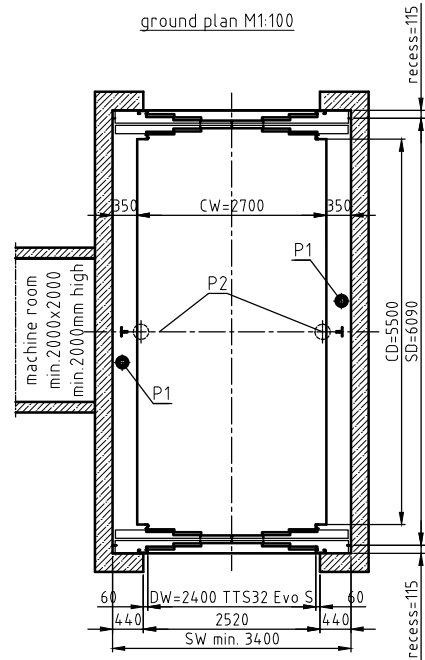



Throughcar, landing doors in recesses
6-panel telescopic doors
Landing doors in accordance with EN81-58 (E120)

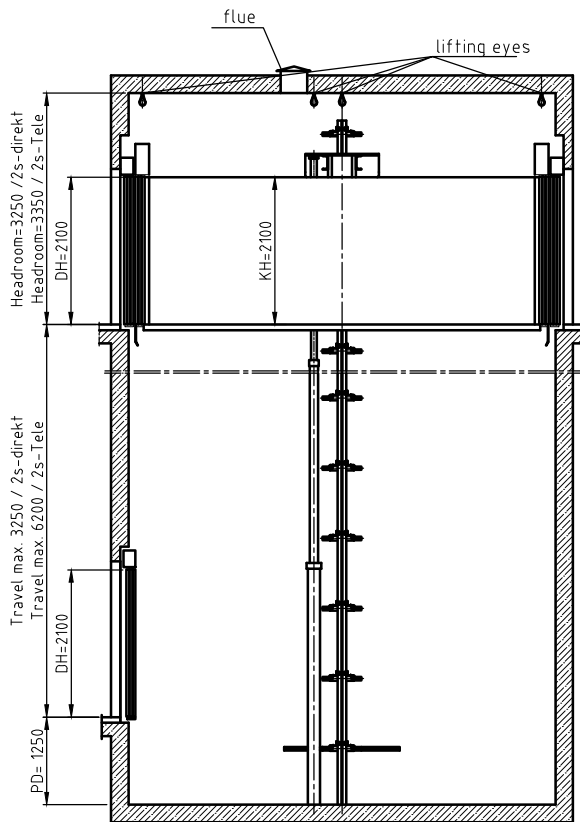

headroom with position liftingeyes M1:200

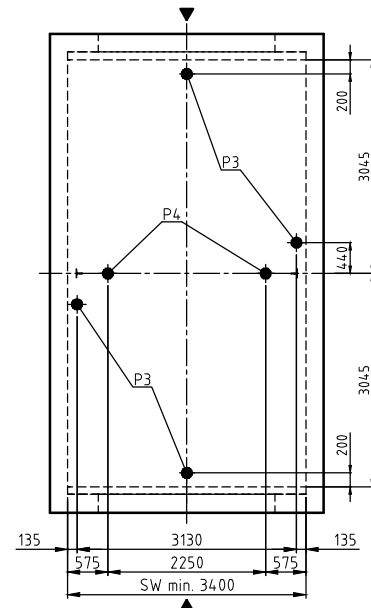

Guide rail loads



$F_x = 14,8 \text{ kN}$
 $F_y = 12,5 \text{ kN}$

Sill load = max. 2520kg

Pit loads

P1	135 kN each
P2	250 kN each

Top loads

P3	12kN each
P4	25kN each

Lift shaft

- Concrete min. C25
- Fixing inserts (e.g. Halfen HTA 50/30)
- Scaffolding inserts 30x30
- Structural tolerance in acc. with DIN 18202
- Shaft in acc. with DIN 4102
- Details shown in installation drawing

All dimensions in mm, subject to modifications

Non-binding layout. Subject to change
Issue: 10/12-1