


Panomatic Maxi & Maxi Plus Waste Heights

Range between:-

425 mm Maximum
180 mm Minimum

to centre of pipe

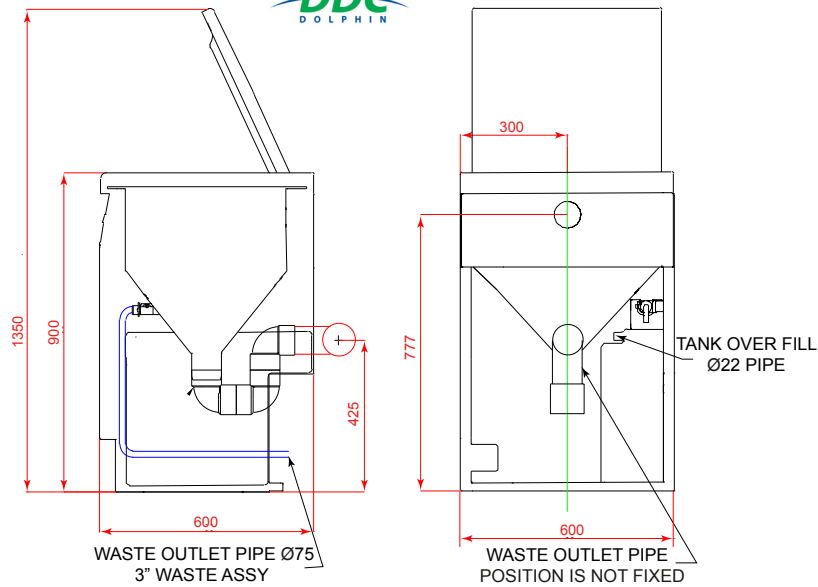

Panomatic Maxi & Maxi +: Product Data



DDC Dolphin Ltd

The Fulcrum, Vantage Way, Poole, Dorset BH12 4NU
tel: +44 (0) 1202 731555 | fax: +44 (0) 1202 731666
info@ddceolphin.co.uk

www.ddcdolphin.co.uk

DDC Dolphin, Pulpmatic, Panomatic, Incomatic, Hygenex, MicrobeSafe are Registered Trademarks

The Panamatic Maxi & Maxi +

Top of the range washer disinfector combining exceptional capacity and versatility

Our top of the range Panamatic Maxi and Maxi + have an extra large wash chamber which can accommodate an extensive range of utensils in various combinations, washing and disinfecting a wide range of articles commonly found in care homes. This exceptional capacity means they are able to accommodate with ease three round or two square commode pots per cycle within a surprisingly compact frame.

Rimflush facility - The Panamatic Maxi+ has the added advantage of a special rimflush facility, particularly useful for disposal function such as emptying buckets or vases. Simply press the foot pedal with the lid open and contents emptied into the chamber are flushed away.

Automatic Disinfection - Thermal disinfection complies with the very latest standards and guidelines, including HTM2030.

Easy service programme – Service support is provided by our own specialist and highly skilled engineers and we offer a choice of fully comprehensive service contracts focused on individual customer needs.



Key Features

Hands free lid opening

Exceptional capacity

Maxi Plus rimflush facility

Digital temperature display

Automatic disinfection

Easy to use

Easy to install

Easy service programme

Due to a policy of continuous development and improvement the right is reserved to supply products which may differ slightly from those described in this brochure

| General | |
|--------------------------------------|--|
| Stainless Steel grade: | 304 |
| Dimensions: w x h x d | 600 x 900 x 600 mm |
| Weight: | Dry 45kg |
| Capacity: | 3 pots + 2 urine bottle |
| Operation cycle time: | 7 minutes |
| Decibel rating: | 50.1 dba |
| Electrical | |
| Voltage: 110V | N/A |
| Voltage: 230V | 50Hz dedicated 13A breaker |
| Voltage:230V | 60Hz dedicated 13A breaker |
| Voltage: 415V | N/A |
| Cable connection: 230V | 3 core sheathed x 1.5mm ² , 2m long |
| Cable connection: 415V | N/A |
| Circuit Protection: | 30mA RCD, GFI, IEC60364 compliant |
| Rated power input: | 2.55kW |
| Electrical consumption per cycle: | 0.33kW |
| Steam generator power: | 2.5kW |
| Motor power: | N/A |
| Pump power: | 0.75kW |
| Water | |
| Water connection: | ¾" BSP male fittings required |
| Water pressure: | Cold water ¾" 0.5-10 bar |
| Water flow rate (Min): | 12 Litres per minute at 1 bar |
| Water tank capacity: | 27 Litres |
| Water consumption per cycle: | |
| Maxi | 26 Litres |
| Maxi+ | 35.5 Litres |
| Waste connection: | N.B. 75mm (3") |
| Overflow connection: | 22 mm |
| Disinfection | |
| Recommended disinfection detergents: | EcoWash+ or EcoWash+ Ultimate |
| Disinfection tank volume: (external) | 5 Litres |
| Disinfection dosing per cycle: | 30 Millilitres |