


## Panamatic XL2 Waste Height

A	Hot water connection 3/4"G (Tube 1/2"G)
B	Cold water connection 3/4"G (Tube 1/2"G)
E1	Drain trap connection DN100 (Wall)
E2	Drain trap connection DN100 (Floor)
F	Omnipolar magneto switch
G	Electrical connection box
H	Equipment clamp



## Panamatic XL2 : Product Data

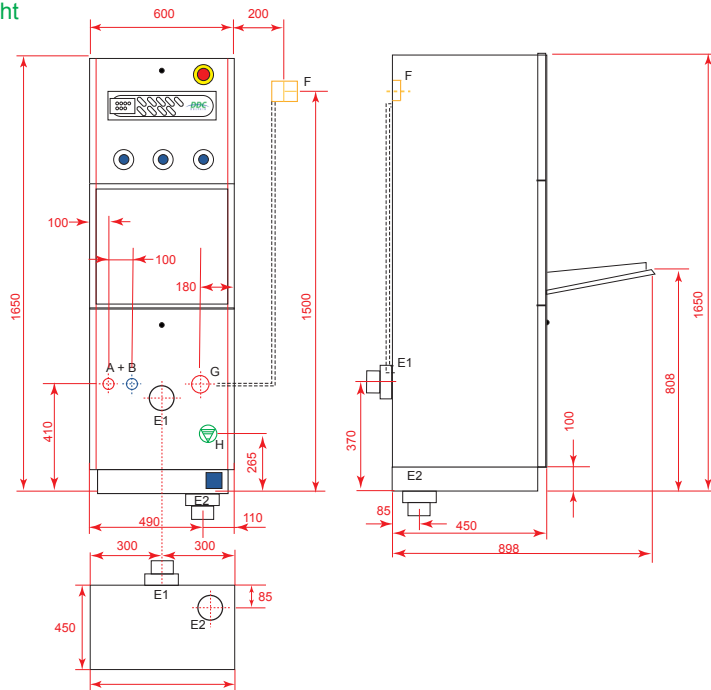

DDC Dolphin Ltd  
 The Fulcrum, Vantage Way, Poole, Dorset BH12 4NU  
 tel: +44 (0) 1202 731555 | fax: +44 (0) 1202 731666  
 info@ddcdolphin.co.uk

[www.ddcdolphin.co.uk](http://www.ddcdolphin.co.uk)

DDC Dolphin, Pulpmatic, Panamatic, Incomatic, Hygenex, MicrobeSafe are Registered Trademarks

## Panomatic XL2

### Top of the range front loading hands free washer disinfectant

The Panomatic XL2 is our top of the range front opening washer disinfectant. The XL2 has an exceptionally large washing chamber, able to process 2 bedpans and 2 urine bottles in one cycle. Available in either a manual or hands free option, with the latter incorporating a foot pedal for opening the door and elbow buttons for selecting and initiating cycles, the XL2 is not only available as a stand alone machine, but can be supplied as wall mounted, built-in and under worktop models. The XL2 is simple to install, simple to operate and simple to service and maintain with advanced computer diagnostics and in-built routine maintenance warning systems and complies fully with European Standards ISO 15883. The XL2 also incorporates a **USB** port for connection to a personal computer for software upgrades and an **EHMI** control keyboard with graphic display showing all the chosen program phases, managing automatic diagnostics as well as constantly monitoring hygienic functions during the cycle.

**Automatic Disinfection** - Thermal disinfection complies with the very latest standards and guidelines, including HTM2030.

**ETS** - Empty Total System, a special device for automatically emptying all the water present at the end of each cycle from the water pump, the water storage tank and the pipes EN ISO 15883-1 p5.3.2.1 - 5.5.11

**Easy service programme** – Service support is provided by our own specialist and highly skilled engineers and we offer a choice of fully comprehensive service contracts focused on individual customer needs.



## Key Features

Complies to European standards ISO 15883

Digital programme display

Automatic open, close & start option available

ETS

Wall mounted built-in and under worktop options available

Large capacity

Easy to install

Easy to use

Easy service programme

Due to a policy of continuous development and improvement the right is reserved to supply products which may differ slightly from those described in this brochure

### General

<b>Stainless Steel grade:</b>	304
<b>Dimensions: w x h x d</b>	600 x 1650 x 500 mm
<b>Weight:</b>	Dry 100kg
<b>Capacity:</b>	2 urinals + 2 bed pans
<b>Operation cycle time:</b>	7-8 minutes
<b>Decibel rating:</b>	54 dba

### Electrical

<b>Voltage: 110V</b>	60Hz dedicated 13A breaker
<b>Voltage: 230V</b>	50Hz dedicated 13A breaker
<b>Voltage:230V</b>	60Hz dedicated 13A breaker
<b>Voltage: 415V</b>	50Hz 3Ph + Neutral, 16A
<b>Cable connection: 230V</b>	3 core sheathed x 1.5mm <sup>2</sup> , 2m long
<b>Cable connection: 415V</b>	5 core sheathed x 1.5mm <sup>2</sup> , 2m long
<b>Circuit Protection:</b>	30mA RCD, GFI, IEC60364 compliant
<b>Rated power input:</b>	3.55kW
<b>Electrical consumption per cycle:</b>	0.28kW
<b>Steam generator power:</b>	2.7-3.2kW
<b>Motor power:</b>	N/A
<b>Pump power:</b>	0.8kW

### Water

<b>Water connection:</b>	¾" BSP male fittings required
<b>Water pressure:</b>	Hot & Cold water ¾" 0.5-10 bar
<b>Water flow rate (Min):</b>	20 Litres per minute at 1 bar
<b>Water tank capacity:</b>	12 Litres
<b>Water consumption per cycle:</b>	30 Litres
<b>Waste connection:</b>	N.B. 110mm (4")
<b>Overflow connection:</b>	Internal

### Disinfection

<b>Recommended disinfection detergents:</b>	EcoWash+ or EcoWash+ Ultimate
<b>Disinfection tank volume: (external)</b>	5 Litres
<b>Disinfection dosing per cycle:</b>	24 Millilitres