


Panamatic XLS Waste Height



A	Hot water connection 3/4"G (Tube 1/2"G)
B	Cold water connection 3/4"G (Tube 1/2"G)
E1	Drain trap connection DN100 (Wall)
E2	Drain trap connection DN100 (Floor)
F	Omnipolar magneto switch
G	Electrical connection box
H	Equipment clamp

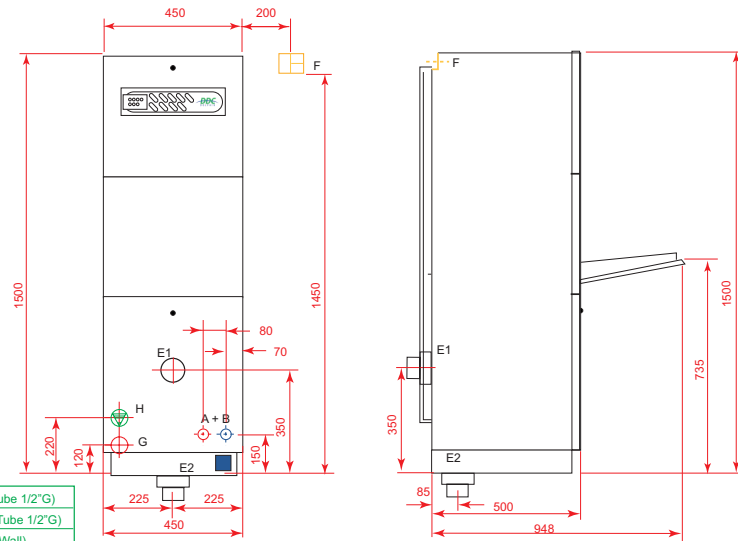

Panamatic XLS : Product Data



DDC DolphIN
 DDC DolphIN Ltd
 The Fulcrum, Vantage Way, Poole, Dorset BH12 4NU
 tel: +44 (0) 1202 731555 | fax: +44 (0) 1202 731666
 info@ddcdolphin.co.uk

www.ddcdolphin.co.uk

DDC DolphIN, Pulpmatic, Panamatic, Incomatic, Hygenex, MicrobeSafe are Registered Trademarks

Panamatic XLS

Entry level manual front loading washer disinfecter

The XLS is our entry level front loading Panamatic. The XLS is designed to wash and disinfect human waste containers used in nursing homes, small clinics and hospitals where a simple machine is needed. The XLS is only supplied as a manually operated appliance, and has the capacity for three urine bottles or one urine bottle and one pot per cycle. It has three washing programmes, a control keyboard which shows the phase of the cycle, alarm messages and disinfection temperature. The dosing pump comes complete with level monitoring in the canister and dosage adjustable from the keyboard. Simple to install, simple to use, simple to service and maintain and complies fully with European Standards ISO 15883.

Automatic Disinfection - Thermal disinfection complies with the very latest standards and guidelines, including HTM2030.

ETS - Empty Total System, a special device for automatically emptying all the water present at the end of each cycle from the water pump, the water storage tank and the pipes EN ISO 15883-1 p5.3.2.1 - 5.5.11

Easy service programme – Service support is provided by our own specialist and highly skilled engineers and we offer a choice of fully comprehensive service contracts focused on individual customer needs.



Key Features

Complies to European standards ISO 15883

Digital programme display

Automatic disinfection

ETS

Front loading

Easy to install

Easy to use

Easy service programme

Due to a policy of continuous development and improvement the right is reserved to supply products which may differ slightly from those described in this brochure

General

Stainless Steel grade:	304
Dimensions: w x h x d	450 x 1500 x 500 mm
Weight:	Dry 85kg
Capacity:	3 urinals; 1 bed pan + 1 urinal
Operation cycle time:	7-8 minutes
Decibel rating:	54 dba

Electrical

Voltage: 110V	60Hz dedicated 13A breaker
Voltage: 230V	50Hz dedicated 13A breaker
Voltage:230V	60Hz dedicated 13A breaker
Voltage: 415V	50Hz 3Ph + Neutral, 16A
Cable connection: 230V	3 core sheathed x 1.5mm ² , 2m long
Cable connection: 415V	5 core sheathed x 1.5mm ² , 2m long
Circuit Protection:	30mA RCD, GFI, IEC60364 compliant
Rated power input:	4.05kW
Electrical consumption per cycle:	0.28kW
Steam generator power:	3.2kW
Motor power:	N/A
Pump power:	0.8kW

Water

Water connection:	¾" BSP male fittings required
Water pressure:	Hot & Cold water ¾" 0.5-10 bar
Water flow rate (Min):	20 Litres per minute at 1 bar
Water tank capacity:	8 Litres
Water consumption per cycle:	20 Litres
Waste connection:	N.B. 90mm (3½")
Overflow connection:	Internal

Disinfection

Recommended disinfection detergents:	EcoWash+ or EcoWash+ Ultimate
Disinfection tank volume: (external)	5 Litres
Disinfection dosing per cycle:	24 Millilitres