


Product Specification Document

DATE: 16.07.2019

REF: PL-CW-PSDLS01

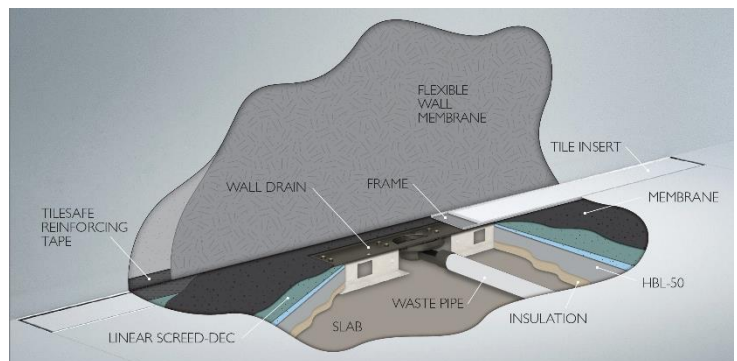

Detailed Description

The Linear Screed Drain has been developed specifically for concrete or screed floors and can be used on concrete slabs, planks and block and beam floors. The total height from the base to the top of the trough is 55mm, ideal for modern construction methods.

The drain incorporates a unique Lo-Seal waterless trap and a lifetime guarantee. Available with one, two or three traps, a floor or wall grill option and a choice of grill finishes. The waterless trap has been specially designed with a spring loaded mechanism which keeps the trap sealed when not in use. This ensures that even when left unused for prolonged periods the trap cannot dry out, making it ideal for situations where the shower is not in everyday use.

The design of the linear trough allows the waste position to be rotated through 360° enabling installation in most scenarios with ease.

System Components

Drain Body
Linear Grill
Brackets

Features and Benefits

- Minimum height 55mm with standard brackets
- Minimum height 38mm with extra shallow brackets
- Flow rate up to 70 L/ min
- Lo-Seal waterless trap
- 360° Rotatable outlet
- Centre, left and right handed trap position
- Height adjustable grill
- Height adjustable brackets
- Available in 15 standard lengths from stock

Product Specification Document

- Easy to clean and replace trap
- Lifetime Guarantee
- BBA Approved
- Fast track bespoke manufacturing service – delivered in 3-4 days

Product Guidance

- Single, Double and Triple traps are available to cope with flow rates of up to 70l/min
- Standard brackets allow drain adjustment from 55mm- 88mm
- Extra shallow brackets allow drain adjustment from 38mm -57mm
- All Linear Screed Drains are manufactured with one trough size at 660mm and all lengths of grill are then fitted onto this trough
- The wall grill width is adjustable to allow for different wall tile thicknesses
- The height of the grill is adjustable in 1 mm increments to suit tile thicknesses of between 6–20 mm
- Additional spacers are available on request for tiles thicker than 20mm
- Floor grill width: 58mm
- Wall grill width: 86mm
- All grills are manufactured from 1.4401 (316) grade stainless steel and are available in a solid, slotted, stone-infill or frameless finish
- All grill finishes are available in 15 standard lengths from 600mm–2000mm
- Bespoke grills can be manufactured for sizes that are in between or over the standard sizes
- Fast track bespoke lengths manufactured and delivered in 3-4 days

Options

Linear Screed Dec and HBL50 Wetroom levelling Compound:

A pre-formed, tapered board with a high density extruded polystyrene (XPS) core and mineral coating, to be installed using self-levelling wetroom compound HBL-50.

See separate Product Specification Document for full details.

Waterproofing Membrane:

CCL Wetrooms Tilesure Waterproofing & Decoupling Membrane or Screedsure membrane, should be applied to the entire bathroom floor area. For larger bathrooms, Tilesure Waterproofing & Decoupling Membrane should be applied to a minimum of the shower area, plus an additional one metre in all directions.

FWM (Flexible Wall Membrane) should then be applied to the walls within the shower area only, to a minimum height of 2000mm and overlapped onto the Tilesure/ Screedsure Reinforcing Tape.

See separate Product Specification Document for full details.

Product Specification

Product reference	Code	Traps	Flow Rate
Drain Body with Standard Brackets	LSD-1C/ST	1: Centre	29 L/min
	LSD-1R/ST	1: Right	29 L/min
	LSD-1L/ST	1: Left	29 L/min

Product Specification Document

Drain Body with Standard Brackets	LSD-2/ST	2	56 L/min
Drain Body with Standard Brackets	LSD-3/ST	3	70 L/min

Product reference	Code	Traps	Flow Rate
Drain Body with Extra Shallow Brackets	LSD-1C/ES	1: Centre	29 L/min
	LSD-1R/ES	1: Right	29 L/min
	LSD-1L/ES	1: Left	29 L/min
Drain Body with Extra Shallow Brackets	LSD-2/ES	2	56 L/min
Drain Body with Extra Shallow Brackets	LSD-3/ES	3	70 L/min

Grill Type

Product reference	Code	Length	Grill Finish
Linear Wall Grill	SWG-600	600mm	Add code for Grill Finish
	SWG-700	700mm	
	SWG-800	800mm	
	SWG-900	900mm	
	SWG-1000	1000mm	
	SWG-1100	1100mm	
	SWG-1200	1200mm	
	SWG-1300	1300mm	
	SWG-1400	1400mm	
	SWG-1500	1500mm	
	SWG-1600	1600mm	
	SWG-1700	1700mm	
	SWG-1800	1800mm	
	SWG-1900	1900mm	
	SWG-2000	2000mm	
	SWG-FT	Bespoke	
	SWG-BES	Bespoke	

Linear Floor Grill	SFG-600	600mm	Add code for Grill Finish
	SFG-700	700mm	
	SFG-800	800mm	
	SFG-900	900mm	
	SFG-1000	1000mm	
	SFG-1100	1100mm	
	SFG-1200	1200mm	
	SFG-1300	1300mm	
	SFG-1400	1400mm	
	SFG-1500	1500mm	
	SFG-1600	1600mm	
	SFG-1700	1700mm	
	SFG-1800	1800mm	
	SFG-1900	1900mm	
	SFG-2000	2000mm	
	SFG-FT	Bespoke	
	SFG-BES	Bespoke	

Product Specification Document

Grill Finish

Type A - Solid grill, grained stainless steel with 5mm gap around the grill.

Type B - Oblong slots, three rows of oblong slots in a grained stainless steel finish.

Type C - Square holes, three rows of squares in a grained stainless steel finish.

Type S8 – Stone-infill grill. Allows a section of tile to be inserted to provide a sleek continuous finish. Suitable for 6-8mm stone/porcelain tiles.

Type S12 – Stone-infill grill. Suitable for 10.12mm stone/porcelain tiles.

Type S20 – Stone-infill grill. Suitable for 18-20mm stone/porcelain tiles.

Type F - Frameless grill, suitable for use with natural stone and porcelain tiles.

Manufacturer

Name: CCL Wetrooms

Contact Info: **Address:** Lodge Farm
Hook Road
North Warnborough
Hook
RG29 1HA

Tel: +44 (0)844 3276002

Fax: +44 (0)1256 765100

Web: www.ccl-wetrooms.co.uk

Email: info@ccl-wetrooms.co.uk
