




SASH & CASE LOOK-ALIKE

(RL) Inward opening

N | TECH 1.2

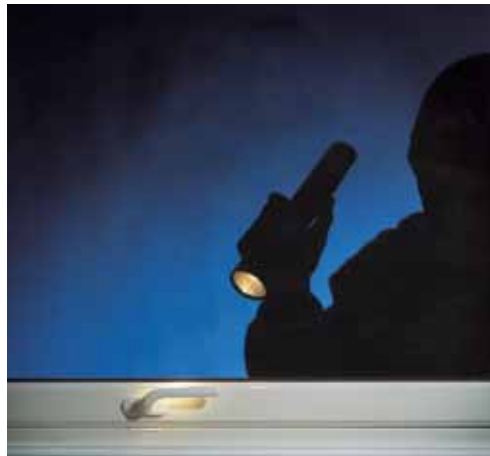

- Higher weather performance than a standard sash & case window
- Strong, secure seven point locking system
- Safe cleaning from inside
- Controlled ventilation
- Fire escape (size permitting)
- Wide range of optional extras



Enhanced security



Safe for children



Clean safely from inside



Possible fire escape



Sound reduction



Energy saving



SASH & CASE LOOK-ALIKE

(RL) Inward opening



■ Ventilation position, interior view



Cleaning position, interior view



Closed position, interior view



Closed position, exterior view standard timber

■ Based on the 3 handled tilt & turn construction

OPERATION

For ventilation, the two side handles can be easily opened, allowing the sash to tilt approximately 100mm. For cleaning, the sash opens into the turn position by firstly opening the side handle and then the bottom handle. The sash opens inwards (opening approximately 67° from the frame) to allow easy access to the external glass. The cleaning position can also be used for emergency escape depending on size and location.

CONSTRUCTION

FRAME AND SASH

The 92mm deep frame and 67mm sash offers a solid, high performance construction. Timber is double vacuum impregnated for protection and has full PEFC chain of custody accreditation.

DOUBLE GLAZED SEALED UNIT

Improved energy saving unit contains low emissivity glass and argon filled cavities: 6mm +16mm Argon + ES4mm. Many other glazing options are available. Warm edge technology is employed in the spacer bars to improve the thermal efficiency of the sealed unit.

IRONMONGERY

The seven locking points ensure that the sash is tightly closed against the gasket, making the window both secure and extremely weather-tight.

RESTRICTORS

A metal restrictor stay is standard and fitted adjacent to the side handle. An alternative high density polymer child restrictor is available to order.

OPTIONS

TRICKLE VENT

Being independent of the sash, the vent can operate even when the window is securely closed. NorDan's integral ventilation system means there is no unsightly external vent hood.

FURTHER OPTIONS

- Mullions and transoms
- Removable handles
- Locking handles
- Additional restrictor stays
- Factory pre-finished to any colour from the classic RAL range

AVAILABLE SIZES

Min width	388 mm
Max width	2088 mm
Min height	388 mm
Max height	2188 mm
Max width + height	3300 mm

NOTE: Size limitations also depend on the weight of the glazing, for further information please contact your nearest NorDan office.