



www.armadillonv.com

Armadillo Armacush

Vibration, Shock & Acoustic Isolation

Introduction & Description

Armacush 200 is high performing yet cost effective polyurathane bound rubber granular material developed specifically for structurela isolation of ground slabs. A key aspect in this application is a long service life free from creep leading to reduced Isolation performance.

Maximum Working stress of 0.10 N/mm².
Armacush 200 is completely recyclable, giving compliance to environmental policies.



Physical Information

Supplied in roll form 1250mm wide by 10 Metres long. Available thickness 6mm, 10mm, 15mm and 20mm.

Technical Information

- Maximum Load Bearing Capacity Roll Size
- Temperature Range
- Static Modulus of Elasticity Dynamic Modulus of Elasticity Compression Set to DIN 53572
- Elongation at Break to Din 53571 Tear Resistance to DIN 53515
- 0.10 N/mm²
- 10 Metres by 1250mm to -40°C to 110°C
- 0.80-0.90 N/mm²
- 0.60-2.2 N/mm² 4.0%
- Minimum 70% Minimum 3.4 N/mm

Call **+44 1274 591115** For all enquiries


Armadillo N & V, Brighton St
Shipley, West Yorkshire,
BD17 7EB

armadillonv.com
sales@armadillonv.com


Armadillo Armacush

Vibration, Shock & Acoustic Isolation

Load Deflection

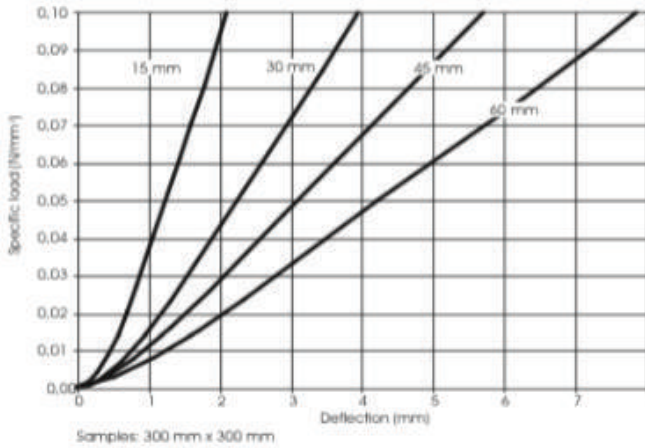

Natural Frequency

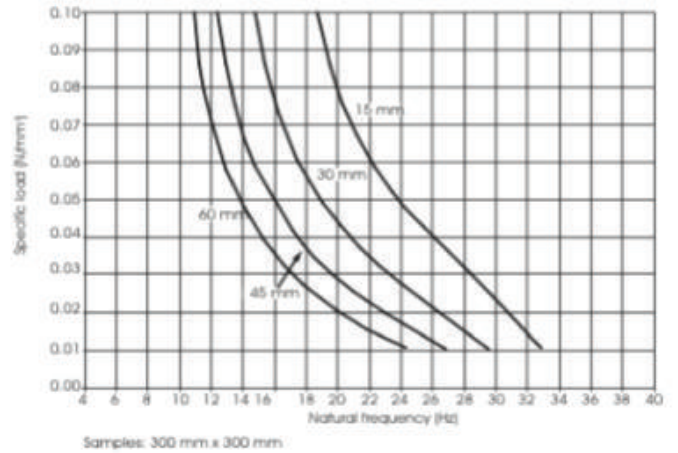

Vibration Insulation

