



DPH-1 - height 28mm

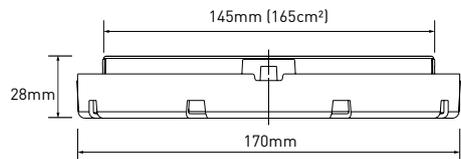

DPH-1 (28mm)

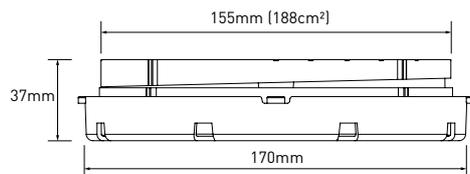

DPH-1+PH5 (37mm)



Height range

28mm, fixed height.

Addition of PH5 slope corrector gives 0-5% slope correction.

Height with PH5: 37mm.

Material

Co-polymer polypropylene (CPP), material thickness 2 to 5mm.

Composition: 80% CPP recycled, 20% talc + UV master batch black, and 100% recyclable.

Base dimensions

Base - diameter 170mm, surface area 227cm².

Top - diameter 145mm, surface area 165cm².

Performance characteristics


Resistant to aging, poor weather conditions, UV light, almost all chemicals, and rot proof.

Suitable for use in temperatures from -30°C to +90°C.

Application

Support for raised floors in outdoor or indoor applications. Can support any type of timber decking or ceramic, stone, concrete paving or flag material, as well as fibreglass or metal grid panels.

Suitable for any kind of stable substrate, including applications directly over insulation panels.



Slope corrector PH5


Can be simply and quickly fitted to the pedestal. Provides slope correction from 0-5% (in 0.5% intervals). Adds 9mm to the overall height of the

pedestal.




Accessories

Spacer tabs: For achieving uniform gaps between used decking material. Available in 2, 3, 4.5, 6, 8 and 10mm. Fixed to top of pedestal by clipping in only. Tab heights: 17 or 25mm dependent on tile thickness.



Available with tab widths of 2, 4.5, 6, 8, and 10mm



Available with tab widths of 3 and 4.5mm

Joist support: Supports timber, aluminium or composite joists for most decking systems.



Joist max. 65mm
Thickness 4mm

Shim: Enhances acoustic performance and can help level uneven paving materials.



1mm and 2mm
thickness

EPDM -60 Shore

Load capacity (1 daN = 1kg/f = 2.23lb/f)

Tests executed with load bearing on central (1/1), half (1/2) and quarter (1/4) position on the pedestal.

Position	Load (daN)	Load (lbf)
1/1	5225	11652
1/2	2410	5374
1/4	1362	3038



Buzon Pedestal International s.a. / n.v.

Z.I. des Hauts-Sarts, Zone 1 - Prolongement rue de l'Abbaye, 134 - B-4040 Herstal - Belgium

Tel +32 (0) 4 248 39 83 Fax +32 (0) 4 264 82 38 E-Mail info@buzon-world.com www.buzon-world.com