


## Alpine Sparkling Specification Sheet



Instant chilled & sparkling filtered water

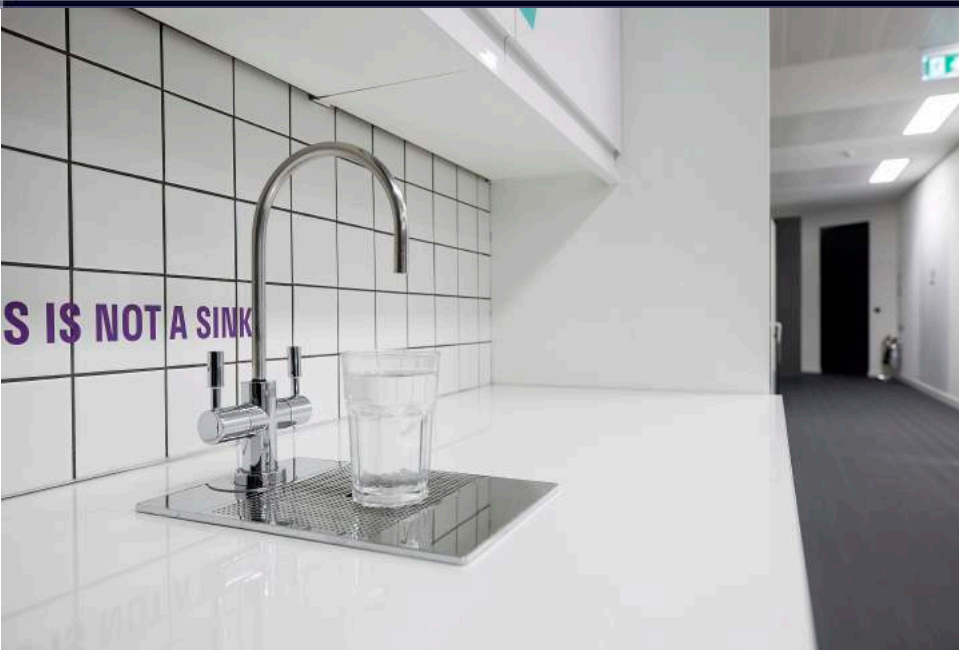

Dual Levered Slimline in Chrome

**The Alpine Sparkling system is a filtered chilled & sparkling water system which provides chilled and sparkling water instantly. It delivers the following benefits:**

### **Saturated sparkling system**

The CO<sub>2</sub> injection system used in the Billi Sparkling range ensures the saturation of CO<sub>2</sub> in the water is high which means it has a better life and, consequently, taste.

### **Adjustable sparkling water**

Adjust the level of sparkling to suit your taste with adjustable controls up to 5 bar of CO<sub>2</sub> pressure.

### **Adjustable chilled temperature**

The new Billi sparkling models have an improved chilling capacity & recovery time. A simple adjustable control knob allows the chilled water temperature to be raised or lowered for chilled and refreshing drinks.

### **New Ice Bank technology for chilled and sparkling water**

Our Ice bank technology has a chilled reservoir where both sparkling and chilled water supply passes through. In doing so, the dispensed water temperature is consistently chilled, also providing a higher level of carbonation.

## Alpine Sparkling Specification Sheet

### Specifications and guide to standard model selection

Product Number	Description	Suggested no. of persons	Delivery cups / hour	Power required (amps)	Unit Height (mm)	Unit Width (mm)	Unit Depth (mm)
933120DCH	Alpine Sparkling 120 Dual Levered Chrome	20	120	13	420	180	460

### Electrical installation requirements

The Alpine Sparkling requires a standard 13 amp power outlet. It is supplied with a 1 metre flex cord and plug.

### Water supply

A single 15mm (1/2") BSP stop-tap with a male thread + position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 2.5 bar to a maximum of 10 bar.

### CO<sub>2</sub> Gas Cylinder

Each cylinder contains 1100g of CO<sub>2</sub> and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings.

The replacement CO<sub>2</sub> gas cylinders are available online at [www.billi-uk.com/online](http://www.billi-uk.com/online).

### Warranty

The Sparkling range is covered by a comprehensive 2 year warranty on all parts and labour.

### Technical Advice

Contact Billi (UK) LLP on **020 7456 6789**.

### Filtration

Billi have partnered with globally recognised brand Pentair Everpure to create the most technologically advanced filtration for instant boiling and chilled filtered water systems. It removes sediment and chemicals, allows the flow of minerals through without scale build up and suppresses harmful bacteria in the water. Due to the unique Fibredyne™ technology, our filters have a longer life, higher flow rate and lower pressure drop, leaving you with healthy fresh water. All Billi cartridges are certified by NSF International.


Filter changes are made simple by our swing-change system and replacement cartridges are available online at [www.billi-uk.com/online](http://www.billi-uk.com/online). Optional sub micron and premium submicron filters are available.

### Certifications


Every Billi drinking water appliance is manufactured under a certified quality control system. Billi Sparkling models have been tested and comply with all required standards including: Watermark License Number 022690; Tested to; ATS5200.105 and AS/NZS4020; AS1428 Accessibility Design Requirements; ISO9001 Certificate Number QEC 11627.



### Preferred installation layout

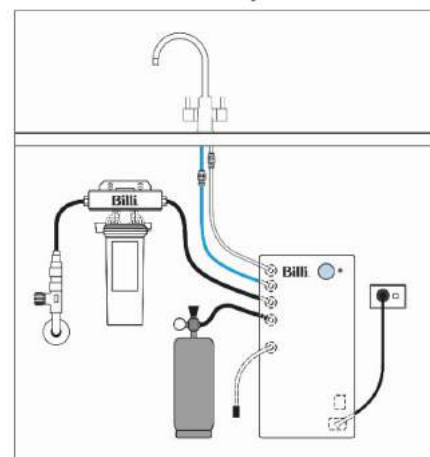

### Dual Levered Slimline tap dimensions

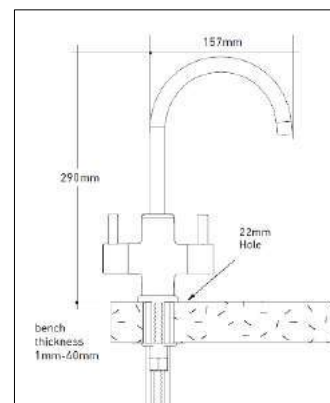

1 cup = 170ml. Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. Consideration may be needed for.