


## EARTHWOOL ACOUSTIC FLOOR SLABS

March 2018

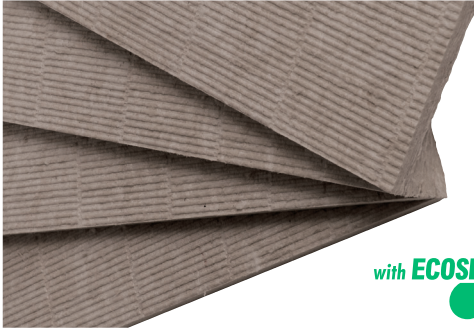

with **ECOSE** TECHNOLOGY

### APPLICATIONS



### DESCRIPTION

Earthwool Acoustic Floor Slab is a dense Rock Mineral Wool slab for the acoustic insulation of separating floors.

Earthwool Acoustic Floor Slab Plus is an extra high dense Rock Mineral Wool slab specifically designed to meet the requirements of a floating floor treatment for use in Robust Detail separating floors.

### PERFORMANCE

#### Fire

Classification: EUROCLASS A1 to BS EN 13501-1

### BENEFITS


- ✓ Non-combustible A1 Reaction to Fire rating
- ✓ Excellent acoustic and thermal performance
- ✓ Excellent compressive strength
- ✓ Easy to install

### SPECIFICATIONS

Thickness (mm)	Length (mm)	Width (mm)	Pieces per pack	Area per pack (m <sup>2</sup> )	Packs per pallet
Earthwool Acoustic Floor Slab					
25	1000	600	15	9.00	12
Earthwool Acoustic Floor Slab Plus					
50	1000	600	5	3.00	16
25	1000	600	11	6.60	16

All dimensions are nominal

### CERTIFICATION



## EARTHWOOL ACOUSTIC FLOOR SLABS

March 2018

### ADDITIONAL INFORMATION

#### Durability

Earthwool Acoustic Floor Slab and Earthwool Acoustic Floor Slab Plus are odourless, rot proof, non-hygroscopic, do not sustain vermin and will not encourage the growth of fungi, mould or bacteria. Earthwool Acoustic Floor Slabs are non-wicking when tested in accordance with BS 2972:1989 Section 12.

#### Application

Earthwool Acoustic Floor Slab is designed for use as a resilient layer in the acoustic insulation of separating floors and meets the requirement in Approved Document E (England and Wales) for a resilient layer under a floating platform - mineral wool, 25mm thick, nominal density between 60 and 140 kg/m<sup>3</sup>. Earthwool Acoustic Floor Slab Plus is designed for use as the resilient layer in a Floating Floor Treatment (FFT) and meets the specification requirements in accordance with Robust Details Ltd.

#### Standards

Earthwool Acoustic Floor Slab and Earthwool Acoustic Floor Slab Plus are manufactured in accordance with BS EN 13162, ISO 50001 Energy Management Systems, OHSAS 18001 Occupational Health and Safety Management Systems, ISO 14001 Environmental Management Systems, and ISO 9001 Quality Management Systems, as certified by Bureau Veritas.

#### Environmental

Earthwool Acoustic Floor Slab and Earthwool Acoustic Floor Slab Plus represent no known threat to the environment and have zero Ozone Depletion Potential and zero Global Warming Potential.

#### Handling and storage

Earthwool Acoustic Floor Slab and Earthwool Acoustic Floor Slab Plus are easy to handle and install, being lightweight and easily cut to size, where necessary. They are supplied in polythene packs which are designed for short term protection only. For longer term protection on site, the product should either be stored indoors, or under cover and off the ground. Earthwool Acoustic Floor Slab and Earthwool Acoustic Floor Slab Plus should not be left permanently exposed to the elements.



Knauf Insulation mineral wool products made with ECOSE Technology® benefit from a no added formaldehyde binder, which is up to 70% less energy intensive than traditional binders and is made from rapidly renewable bio-based materials instead of petroleum-based chemicals. The technology has been developed for Knauf Insulation's glass and rock mineral wool products, enhancing their environmental credentials without affecting the thermal, acoustic or fire performance. Insulation products made with ECOSE Technology® contain no dye or artificial colours.

#### Knauf Insulation Ltd

PO Box 10, Stafford Road, St.Helens, Merseyside, WA10 3NS. UK

Customer Service: 0844 800 0135

Technical Support Team: 01744 766 666

Literature: 08700 668 660

All rights reserved, including those of photomechanical reproduction and storage in electronic media. Extreme caution was observed when putting together and processing the information, texts and illustrations in this document. Nevertheless, errors cannot quite be ruled out. The publisher and editors cannot assume legal responsibility or any liability whatever for incorrect information and the consequences thereof. The publisher and editors will be grateful for improvement suggestions and details of possible errors pointed out.

KINE1519DAT-V0318

challenge.  
create.  
care.