


HUSH BATTEN SYSTEM

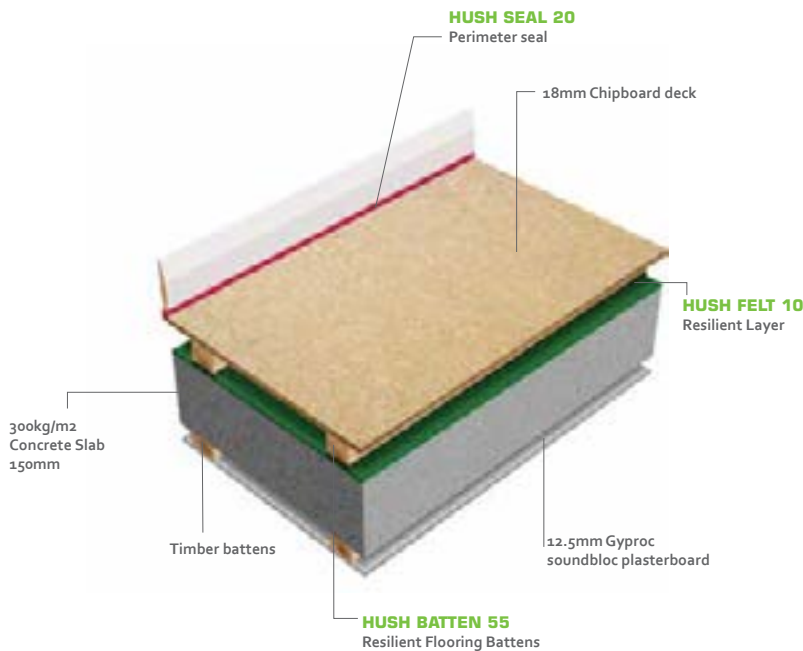

SPECIFICATION

- Hush Battens loose laid at required centres over a layer of Hush-Felt 10 Resilient Layer
- T&G chipboard/plywood, to suit batten centres and loadings, to be laid over Hush Battens using Hush Bond and screw fixings and sealed at all perimeters using the Hush Seal 20 perimeter strip
- Timber battens fixed to the underside of the concrete at required centres
- One layer of 12.5mm Gyproc Soundbloc or Fireline plasterboard secured to the timber battens. Seal all perimeters prior to skimming

Ceiling system to be upgraded if the structure is not at required density

FEATURES

- ✓ Complies with UK Building Regulations Approved Document E (England & Wales), Part G (Northern Ireland) and Section 5 (Scotland).
- ✓ A fully developed economical sound insulation system between separating floors
- ✓ For use in new build, conversion or refurbishment developments that have concrete structures of approximately 300 kg/m³ mass per unit area.

ACOUSTIC PERFORMANCE

Impact $L'_{nT,w}$ dB	Airborne $D_{nT,w}$ dB	Airborne $D_{nT,w} + C_{tr}$ dB
56	56	47

Results based on full Hush System HD1010 being used in conjunction with the correct thickness and density of concrete structure.

BUILDING REGULATIONS STATEMENT

- Approved Document E (England & Wales) incorporates a unit of measurement to determine low frequency airborne sound transmission. Due to proven intrinsic difficulties of measuring low frequency sound, in domestic sized rooms, it must be expected that there could be significant deviations in the accuracy of these measurements.
- There will be variations in measurements from site to site in all UK Building Regulations whether it be Document E (England & Wales), Section 5 (Scotland) or Part G (Northern Ireland). These variations are caused by structural differences in buildings, general site conditions and workmanship.
- All these factors can influence the repeatability of both impact and airborne acoustic test results. Therefore, any test results must be considered as an indication only and no warranty can be given or implied as to the actual acoustic performance in any particular situation.

[VIEW ON OUR WEBSITE](#) >

HUSH ACOUSTICS

TEL: 0151 933 2026

EMAIL: info@hushacoustics.co.uk

www.hushacoustics.co.uk

[in](#) hush-acoustics [@](#) hushacoustics

[t](#) @hushacoustics [f](#) hushuk.acoustics

44 Canal Street, Bootle, Liverpool L20 8QU

Offices also based in London and Yorkshire



HUSH ACOUSTICS
Sound Insulation Products and Systems